


# mariner 2400S - 2800S



CONTROL PANEL

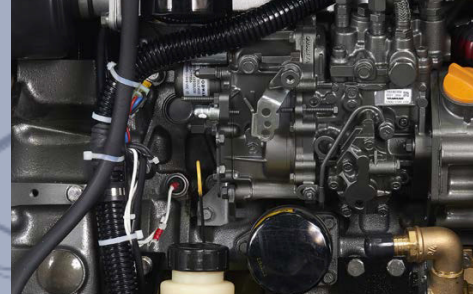

YANMAR ENGINE



INPUT/OUTPUT FUEL PIPE

**the** engine is cooled by a coolant loop in a closed circuit. The system consists of a heat exchanger, inside which the heat exchange between coolant and sea water takes place. Two separate pumps provide for the circulation of coolant and seawater. Air flows ensure effective cooling of the alternator. The excellent accessibility makes maintenance operations easier, even with the generator installed in confined environments.



COMPACT DESIGN



EASY INSTALLATION



SUPER SILENCED

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.



**mase generators spa**

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

**mase**  
**GENERATORS**  
*Believing in change.*



Output power 26 kW 50 Hz - 30 kW 60 Hz

## CONTROL PANEL

\_ CBU EVO IL4 device controls and drives the genset. The large display and control pushbuttons allow easy use and monitoring:

- Manual start
- Voltage Vac
- Frequency Hz
- Hour meter
- Genset battery voltage
- Oil low pressure alarm
- Engine preheating
- Engine high temperature alarm
- Alternator battery charger failure alarm
- Protection alarm for frequency and rpm
- Alarm history
- Maintenance warnings
- General alarm outlet
- RUN outlet
- Ready outlet
- Programmable AUX outlet

\_ Emergency stop button

\_ Magneto-thermal protection

## ENGINE





\_ Easy maintenance access to the feeding and lubrication systems, the sea water pump and the air filter

\_ Double vibration dumping system

\_ Oil drain pump

## SOUNDPROOF CABIN

\_ Made of extremely light marine aluminum with very high resistance to external agents

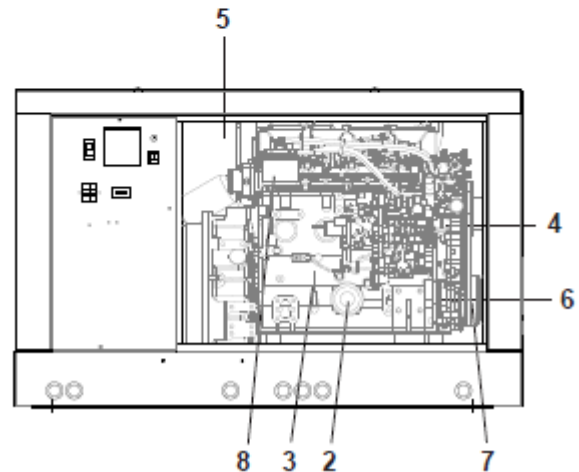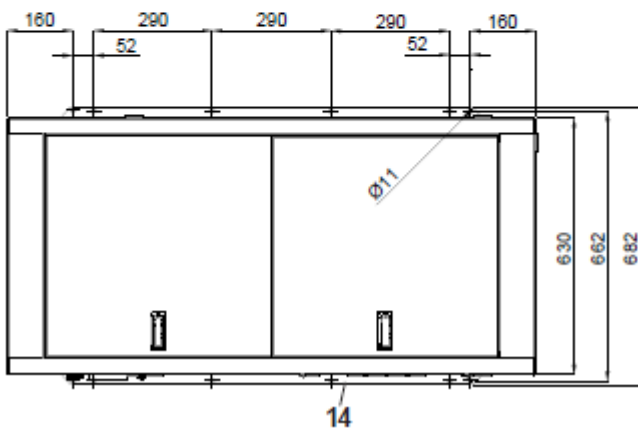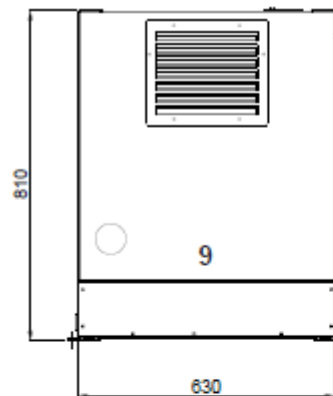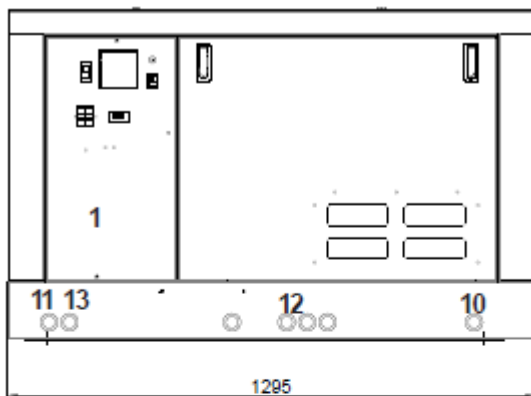

- |                         |                        |                                  |                     |
|-------------------------|------------------------|----------------------------------|---------------------|
| 1. Control panel        | 6. Engine water pump   | 11. Battery connection           | 14. Fixing brackets |
| 2. Oil filter cartridge | 7. Seawater pump       | 12. Fuel tank connection (ø 8mm) |                     |
| 3. Oil dipstick         | 8. Fuel filter         | 13. Electric cable connection    |                     |
| 4. Oil top up cap       | 9. Sea outlet (ø 80mm) |                                  |                     |
| 5. Air filter           | 10. Sea inlet (ø 25mm) |                                  |                     |



Output power 26 kW 50 Hz - 30 kW 60 Hz

	50 Hz	60 Hz
AC alternator -	Synchronous, 4 poles, with AVR	
Cooling -	Air	
Voltage -	115 - 230 V	120 - 240 V
Frequency -	50 Hz	60 Hz
Amps -	226.1 - 113 A	250 - 125 A
Max power -	26 kW	30 kW
Continuous power -	24 kW	28 kW
Power Factor -	cos $\phi$ 1	
Insulating class -	H	
Voltage stability -	$\pm 2\%$	
Frequency stability -	$\pm 5\%$	

The power is referred to an atmospheric pressure of 100 kPa, a humidity percentage of 30% and an ambient temperature of 25°C.

Model -	Yanmar 4TNV98	
Type -	Diesel	
Cylinders -	nr 4	
Cylinder block material -	Cast iron	
Bore -	98 mm - 3.86 in	
Stroke -	110 mm - 4.33 in	
Displacement -	3319 cc - 202.54 CID	
Power -	47 hp - 34.57 kWm (at 1500 RPM)	56 hp - 41.19 kWm (at 1800 RPM)
RPM -	1500	1800
Compression ratio -	18.5:1	
Combustion system -	Direct injection	
Engine head material -	Cast iron	
Speed governor -	Mechanical	
Lubrication system -	Forced	
Oil sump capacity with filter -	8.20 l - 2.31 gl	
Engine stop system -	Electromagnet	
Fuel pump -	Electric	
Max. fuel pump head -	700 mm - 27.5 in	
Fuel consumption -	7.6 l/h - 2.01 gl/h	8.9 l/h - 2.35 gl/h
Air intake -	2700 l/min - 95 cfm	
Starting battery -	100 Ah - 12 V	
Battery charger -	40 Ah - 12 V	
Starter motor -	2.3 Ah - 12 V	
Max. inclination -	25°	
Water pump flow -	40 l/min - 10.56 gl/min	45 l/min - 11.88 gl/min
Sea water inlet pipe $\varnothing$ -	25 mm - 1"	
Exhaust pipe $\varnothing$ -	80 mm - 3.1	
Input/Output fuel pipe $\varnothing$ -	8 mm - 5/16"	
Dimensions (L x W x H) -	1295 x 630 x 810 mm - 51 x 24.8 x 31.9 in (with soundproof box)	
Weight -	595 kg - 1312 lb (with soundproof box)	
Noise Level -	54 dBA at 7 mt (23 ft)	56 dBA at 7 mt (23 ft)



Output power 26 kW 50 Hz - 30 kW 60 Hz

## Accessory

## Code

### ACCESSORIES ON REQUEST

• Filtering kit: sea inlet, water filter, valves, fittings D.25 - ref.4	03793
• Siphon break kit D.25 - ref.3	015849
• Muffler Centek 3" - ref.5	71282
• Water/gas separator 3" Centek - ref.6	71283
• Remote START/STOP panel with 20m cable for Comap IL4 - ref.1	037561
• Comap IL4 remote start panel with 20m cable - ref.2	039607
• Cruise Kit	910994




.1



.2



.3

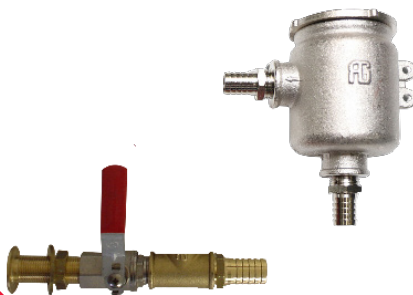

.4



.5



.6